

## *monty® Tyre Changers*



The new generation

## Tyre changers for shops with high tyre service volume



- Those machines handle all conventional tyres in the market quickly and easily. If combined with the optional pneumatic mounting tool easymont pro and other optional adaptors, the machines can also handle run-flat tyres.
- With the outer clamping range of up to 24" the machines are designed to handle tyres of large diameter as well. With optional clamping jaws the clamping range can even be extended to 28".
- The machines are equipped with a double-acting bead breaking cylinder and an oversize bead breaker blade which prevent damage to rim and tyre. Moreover the bead breaker blade is supported in three joints which ensures gentle bead breaking.
- Alloy rims are handled particularly gently as the mounting head and the clamping jaws are provided with plastic protections. The one-part mounting head can be adjusted vertically and horizontally in spaced-apart position relative to the rim
- The pneumatic tilt-back post and the ergonomic pedals stand for user-friendly operation. The bead breaker pedal is provided in ergonomic position relative to the bead breaker arm, avoiding any confusion with other pedals. Moreover the bead breaker is adjustable in five positions, thus guaranteeing an always optimum position of the blade relative to the wheel.
- Accurate and quick operation is guaranteed by the self-centring four-jaw chuck controlled by two clamping cylinders and the pneumatically locked post.
- The pedal-controlled two-speed chuck (3-ph versions only) makes tyre service even quicker.



Optional quick-exchange device and mounting head

- Practical tool box for tools and valves, including an integrated pressure gauge.

### Additional feature of the GP version



The pedal-controlled inflating system via air ports in the jaws facilitates work considerably.

## Professional tyre changers for wheels up to 30" and for shops with high tyre service volume




- The monty 3550 is equipped with the pneumatic mounting tool easymont pro, hence can handle all conventional and run-flat tyres in the market quickly and easily (additional optional accessories are required for PAX and CSR). Owing to the large outer clamping range – up to 26" – (up to 30" with optional clamping jaws) the machine is perfectly suited to handle very large tyres.
- The machine is equipped with a double-acting bead breaking cylinder and an oversize bead breaker blade which prevent damage to rim and tyre. Moreover the bead breaker arm can be preset to two positions.
- Alloy rims are handled particularly gently as the mounting head and the clamping jaws are provided with plastic protections. The one-part mounting head can be adjusted vertically and horizontally in spaced-apart position relative to the rim; approach to the rim flange is accomplished pneumatically.
- Accurate and quick operation is guaranteed by the self-centring four-jaw chuck controlled by two clamping cylinders and the pneumatically locked post.
- The pedal-controlled two-speed chuck (3-ph versions only) and the roller-supported horizontal arm speed up operation even more.
- Pedal-controlled quick-inflating device for quick and safe tyre inflation.
- Practical tool box for tools and valves, including an integrated pressure gauge.
- Including tyre lever Wave, various plastic protections and quick-exchange device with plastic mounting head.

### Gentle



Special bead breaker blade to preserve tyre and rim

### Flexible

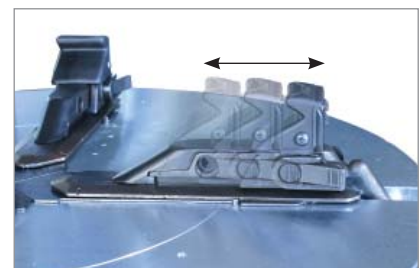

The sliding jaws allow to handle wheels from 10" to 26" (with optional jaws even up to 30").

## Pneumatic mounting tool easymont pro



- The practical pneumatic mounting tool is an indispensable accessory for mounting and demounting tyres which are difficult to handle, such as low profile tyres and run flat tyre systems. It is an optimum complement to a tyre changer.
- The pneumatic mounting tool is extremely rugged and specially suited for hard tyres owing to its strong cylinder.
- Bead breaking with the optional bead breaker disc is done dynamically during rotation of the tyre changer chuck, thus preserving rim and tyre.
- The tyre bead is pressed into the drop centre of the rim by means of a roller so that the mounting head can be positioned on the rim both easily and gently.
- During the demounting operation the bead depressor presses the upper bead into the drop centre of the rim so that it can be easily levered over the mounting head nose and finally demounted without any effort.
- During the mounting operation of the upper bead the roller retains the bead under the mounting head nose. The practical bead depressor follows rotation of the wheel, doing the otherwise tedious job of the operator, while preserving both tyre and rim.
- The pneumatic mounting tool is an optional extra for tyre changers from monty 2300 up to monty 3300 racing and can be easily fitted by the customer. It is a standard feature of monty 3550.

### Simple



Gentle demounting with the bead depressor

### Optional



The plastic bead breaker disc is a useful accessory to prevent any damage to the rim

## monty® accessories – the systematic up-grade

Best. Nr. 4029338



**Mounting head** for rims with elevated spokes

Best. Nr. 4028884



**Mounting head adaptor**

Best. Nr. 4028229



**Quick-exchange device** including plastic mounting head for rims with elevated spokes

Best. Nr. 25946



**Tyre lever Wave**, specially designed for low-profile tyres and run-flat tyres such as DSST, RFT, but not for PAX or CSR. Standard on monty 3300 racing/GP and monty 3550/GP.

Best. Nr. 4029455



**+4" clamping jaws** to increase outer clamping range for monty 3300 racing/GP and 3550/GP

Best. Nr. 4028629



**+4" quick-exchange device** including steel mounting head for monty 3300 racing/GP and 3550/GP

Best. Nr. 4029337



**Mounting head** for motorcycle wheels

Best. Nr. 1977254



**Tyre booster**

Best. Nr. 1971534



**ecolift-2 monty**

Best. Nr. 4026913



**Extension** for mounting tool easymont pro

Best. Nr. 4029261



**Plastic disc** to break the upper bead. Only in conjunction with easymont pro.

Best. Nr. 4029520



**RSC-Kit**  
Only in conjunction with easymont pro.  
Consisting of:

- 26582** Plastic protection for bead breaker blade
- 4029352** Plastic tyre protection
- 4028648** Magic bead pusher
- 4029326** Rod with tapered roller 35 mm

